

Forno Pozzo 24-Inch Built-In Dishwasher Tall Tub, White, 49 dBA, Soil-Sensing Capable, ENERGY STAR

Model: FDWBI8067-24WHT | UPC : 686136980173



INCLUDE
STAINLESS STEEL &
ANTIQUÉ BRASS
HANDLE & KNOBS



KEY FEATURES

- 14 Place Setting
- 3 Racks Design
- Stainless-Steel Tub
- Stemware Glass Holder
- Stainless-Steel Filter
- Nylon Filter mesh
- Quiet Operation
- Included: 2 sets of handles: Stainless Steel and Antique Brass finish.

APPEARANCE

Appliance Type	Built-in
Dishwasher Size	24-Inch
Door Color	White
Tub Material	Stainless Steel
Tub Type	Tall
Handle Color	Stainless Steel & Antique brass
Cycle Status Indicator Light	Yes
Control Location	Top of Door (Hidden)
Control Type	Touch
Number of Racks	3
Silverware Basket	Yes
Rack Material	Nylon Coated Steel wire
Additional Silverware Basket	Yes
Concealed Heating Element	No
Filter Material	Stainless Steel

FEATURES

Number of Place Setting	14
Number of Wash Cycles	6
Cycles Type	<ul style="list-style-type: none"> • Rinse Only • Normal Wash • Energy Saver • China & Crystal • Pots & Pans • Quick Wash
Delay Start Option	Yes, Up to 24-hours
Heated Dry	Yes
High Temp Wash	Yes
Sanitize	Yes
Steam Wash	Yes
Air Exchange	Yes
Targeted Spray Option	Yes
Sensor Wash Cycle	No
Soil-Sensing Capability	Yes
Wash System	Smart Wash System
Low Rinse Aid Indicator	Yes
Number of Wash Arm	3
Folding Down Tines	Yes, Lower Rack
Rack Adjustment	Yes, Upper Rack
Leak Protection	Yes
Interior Light	No
Sound Rating (dB(A))	49
Control Lockout	Yes
Removable Silverware Basket	Yes
Stemware Glass Holder	Yes
Removable Filter Trap	Yes
Door Lock	No
Fill & Drain Hose Included	Drain hose included; fill hose sold separately
Water Filtration	No
Automatic Temperature Control	No
Adjustable Leg	Yes

EFFICIENCY

Water Usage Per Cycle	Up to 3.2 Gallon / Cycle
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption	240 kWh
Yearly Operating Cost (USD)	34 USD

TECHNICAL SPECIFICATIONS

Dedicated Circuit Breaker Amperage (A)	15A to 20A
Total Amperage Usage (A)	8.4A
Volts (V)	120V
Frequency (Hz)	60Hz
Water Inlet Location	Left Bottom Front
Water Inlet Fitting Size (Inch)	3/4"
Required Water Temperature (°F)	120°F to 150°F
Required Water Pressure (PSI)	20 PSI to 120 PSI
Drain Hose Length (feet)	6.75 ft
Power Cord Included	No
Power Supply Connection Location	Right Bottom Front
Safety Listing	cULus Listed
File/Certification Number	E219644


PRODUCT WEIGHT & DIMENSIONS

Product dimensions (WxDxH-Inch)	23.85" x 26.54" x 33.74"
Net weight (lbs & kg)	93.2 lbs 42.27kg

CARTON WEIGHT & DIMENSIONS

Carton dimensions (WxDxH-Inch)	27.36" x 29" x 34.45"
Gross Weight (lbs & kg)	102.5 lbs 46.5kg

PRODUCT DIMENSION

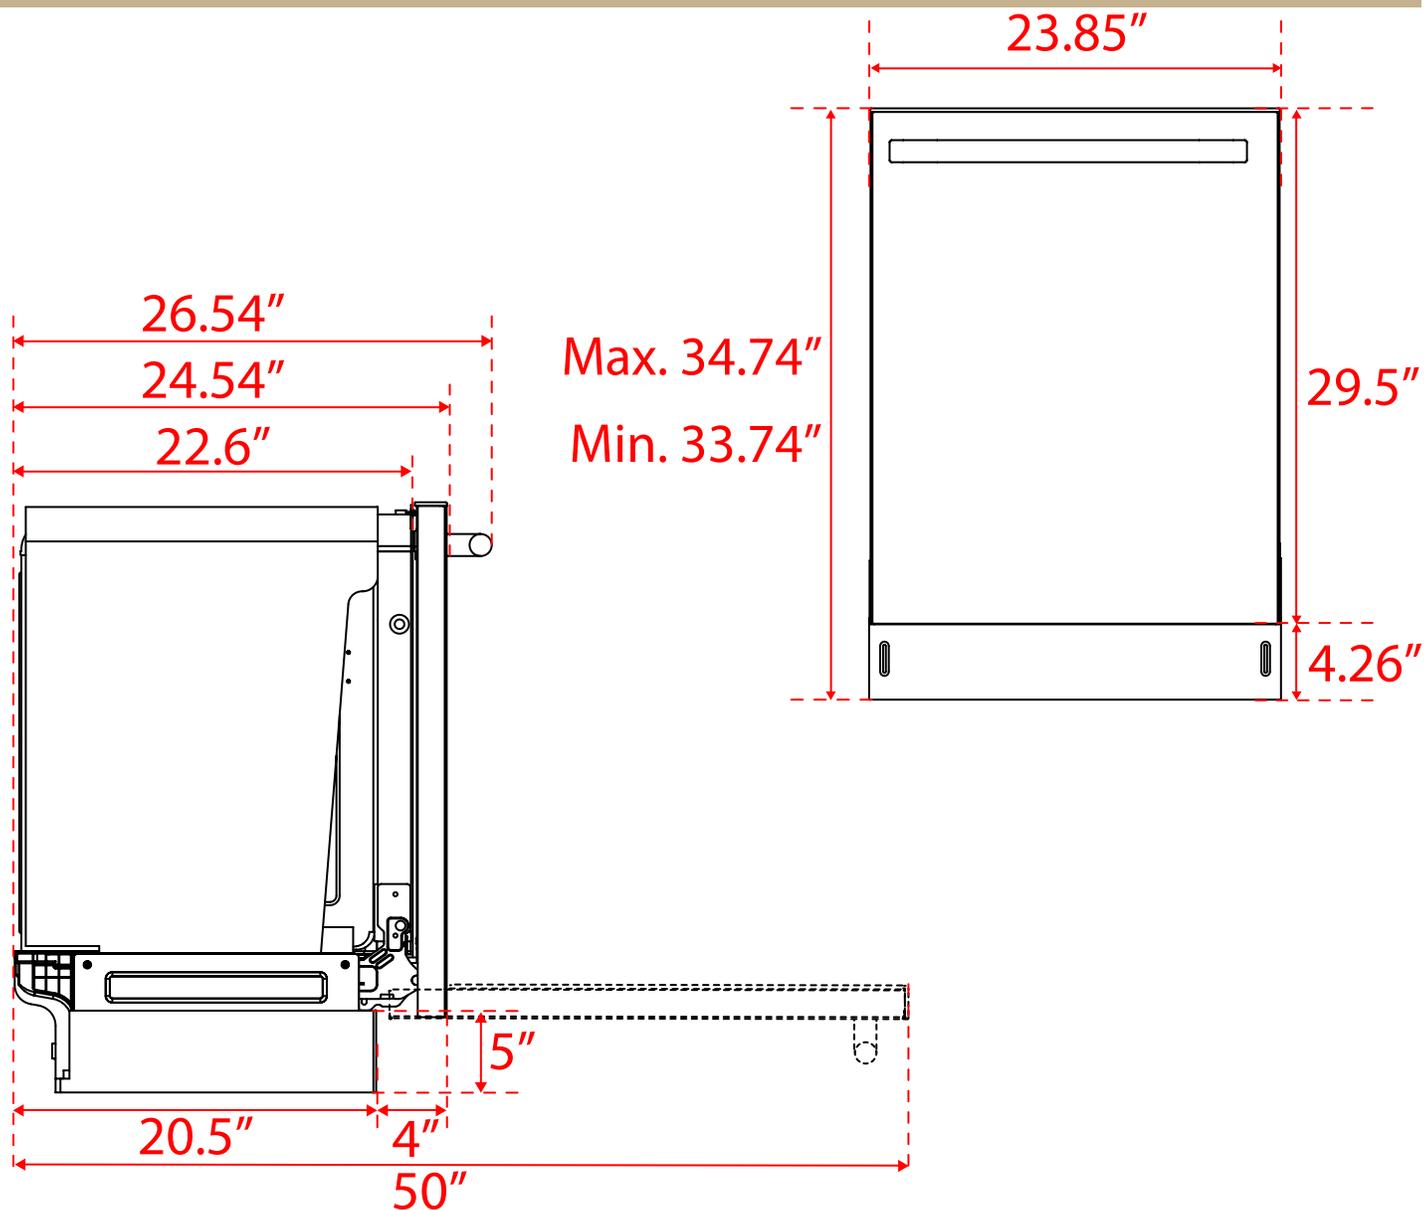

CUTOUT DIMENSION

- The rough cabinet opening must be at least 24" (61 cm) wide and a maximum of 35" (88.9 cm) in height, and provide easy access to water, electricity and a drain.
- When installed in a corner location, a 2" (5.1 cm) minimum clearance is required between the side of the dishwasher and the adjacent wall, cabinet or other appliance.
- There must be a minimum clearance of 25 5/8" (65.1 cm) in front of the dishwasher to allow the door to fully open.

