


# PRODUCT & CUTOUT DIMENSIONS

Model: FMWDR3093-24



## PRODUCT DIMENSIONS

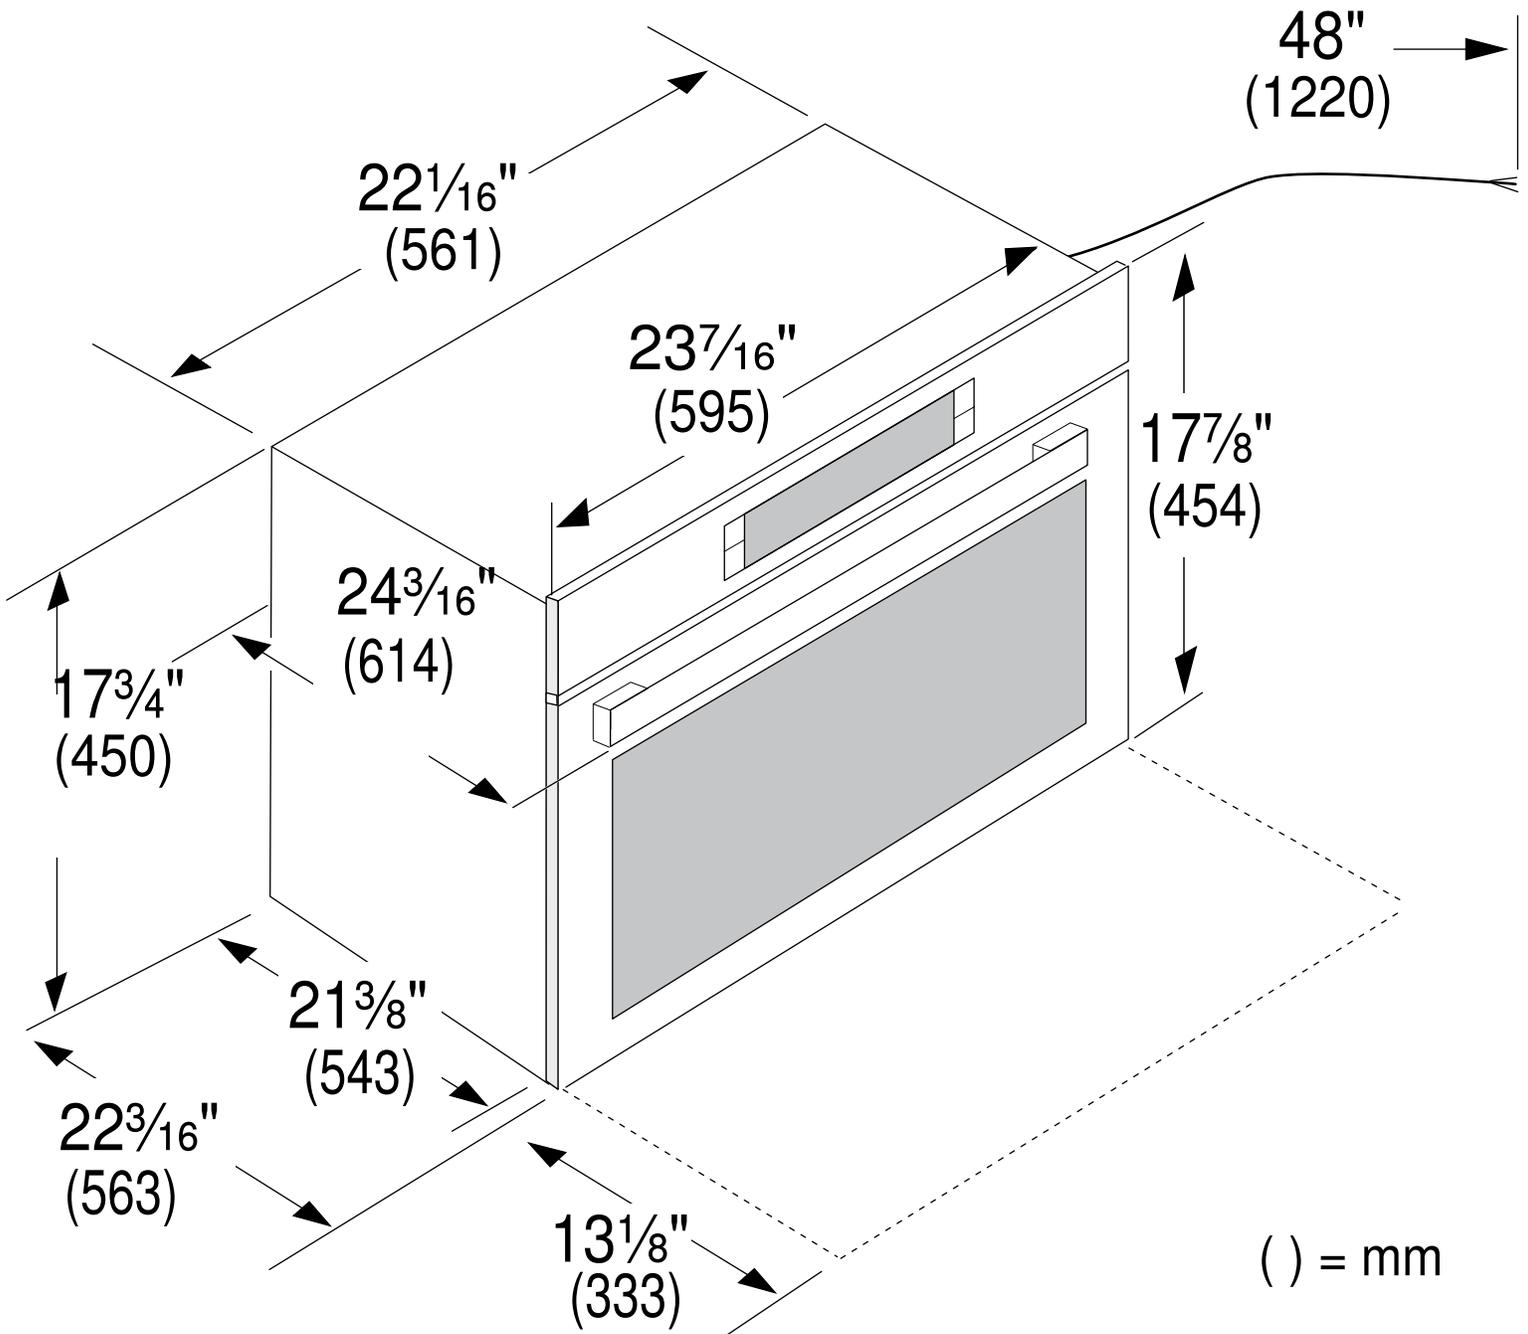


# PRODUCT & CUTOUT DIMENSIONS DIMENSIONS DU PRODUIT ET DES DÉCOUPES

Model/Modèle: FMWDR3000-24



## OUTLET AREA

The outlet can be located anywhere within the shaded area. Anywhere within the shaded area, the minimal distance between the appliance and the wall is  $1\frac{3}{4}$  in (45mm).

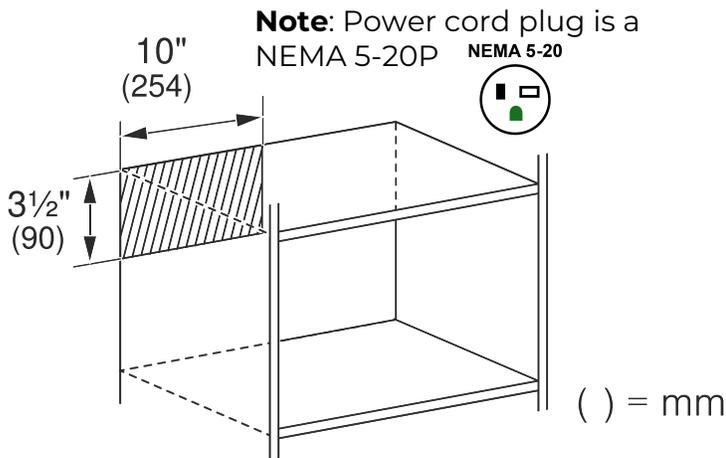


## GENERAL CABINET REQUIREMENTS

- $\frac{1}{4}$ " (6.4 mm) space between the side of the appliance and an adjacent wall or cabinet door when installed at the end of a cabinet run.
  - The cabinet base must be flat and capable of supporting the weight of your appliance when in use.
- See section *Cabinet Dimensions*
- The appliance door will overlap the furniture below by approx  $\frac{3}{16}$ " (5 mm) when opened.


## WARNING

There must be an air gap of at least  $\frac{1}{2}$ " (6 mm) between the appliance and the cabinet walls when the appliance is installed, i.e.  $\frac{3}{8}$ " (3 mm) each side.

## CABINET DIMENSIONS

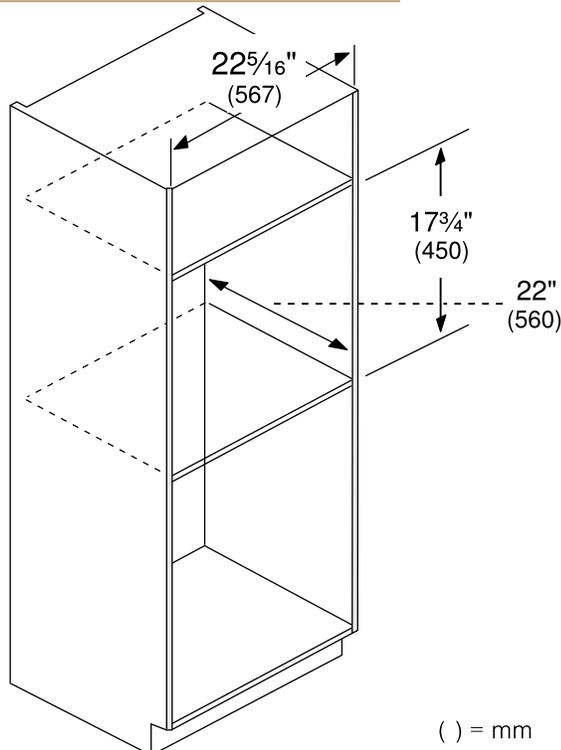

## UNDER COUNTER DIMENSIONS

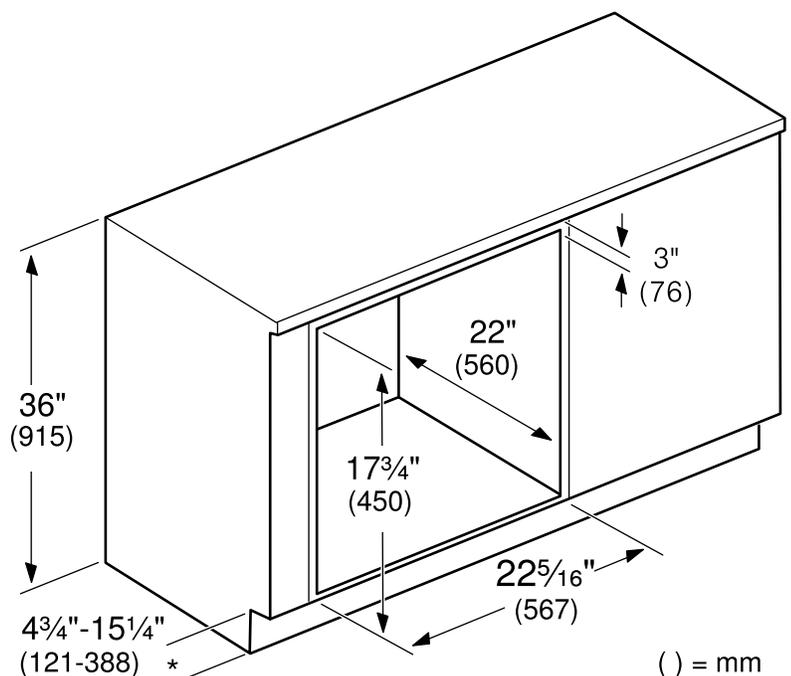

**NOTICE:** The cabinet base must be flat and capable of supporting a weight of at least 142 lbs (64.1 kg).