

es6[®]

Experience Big Ass Fans' groundbreaking engineering and cutting-edge technology in more spaces than ever with the es6 ceiling fan. An inspired blend of the award-winning design and functionality of our popular Essence and i6 ceiling fans, es6 transforms spaces of all sizes with powerful performance and an impressive suite of controls.



KEY FEATURES

- ▶ **Six aluminum airfoils** made from aircraft-grade aluminum in black or white finish
- ▶ **Permanent-magnet motor** provides smooth, quiet comfort with seven airflow speeds
- ▶ **Lightweight design** mounts to a standard junction box on ceilings as low as 9 feet (2.7 meters)
- ▶ **Convenient control** with SenseME Technology, mobile app, and voice integration
- ▶ Built for **indoor or covered outdoor use** with corrosion-resistant materials and reliable safety features
- ▶ **Available LED kit and Chromatic Uplight** offers 16 brightness levels, smart automation, night lite mode, and a full range of color options

DIAMETER

60, 72, AND 84 INCHES
(152, 183, AND 213 CM)

MOUNTING

UNIVERSAL

CONTROL

- **BLUETOOTH REMOTE**
- **MOBILE APP**
- **VOICE INTEGRATION**

WARRANTY

3 YEARS



BIG ASS FANS[®]


CONTEMPORARY STYLE, COMMANDING PERFORMANCE

Visit bigassfans.com/es6 or call **877.244.3267**
to get in touch with our airflow experts and bring
es6's comfort and convenience to your space.

TECHNICAL SPECIFICATIONS

es6[®]

CONTEMPORARY STYLE, COMMANDING PERFORMANCE

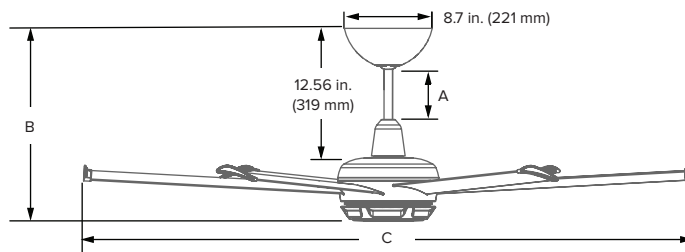

Pictured with 7 in. (178 mm) downrod⁵

Downrod Lengths

Downrod (A)	7 in. (178 mm)	20 in. (508 mm)	32 in. (813 mm)	48 in. (1219 mm)	60 in. (1524 mm)
Fan Height (B)	18.9 in. (480 mm)	31.9 in. (810 mm)	43.9 in. (1115 mm)	60 in. (1521 mm)	72 in. (1826 mm)
Ceiling Height	9–11 ft (2.7–3.4 m)	11–13 ft (3.4–3.9 m)	13–14 ft (3.9–4.3 m)	14–16 ft (4.3–4.9 m)	16–18 ft (4.9–5.5 m)

Technical Specifications

Diameter (C)	CFM	Efficiency (CFM/W)	Max Watts	Max Speed	Input Power	Weight ¹	Light Kit	Chromatic Uplight™	Environment ²	Sound Level ³
60 in. (152 cm)	7,880	307	22	144 RPM	100–240 VAC, 50/60 Hz, 1 Φ	25 lb (11.3 kg)	1,770 lm 72.6 lm/W	1,984 lm 94.8 lm/W	Indoor Covered outdoor (inland) IPX2	<35 dba at max speed
72 in. (183 cm)	9,959	365	26.6	115 RPM		27 lb (12.1 kg)				
84 in. (213 cm)	10,121	429	23	85 RPM		29 lb (13.2 kg)				

Construction Features

Airfoils	Motor and Hub	Controls	Onboard Sensors	Integrations ⁴	Mounting	Accessories
Made from aircraft-grade aluminum Tilted blade profile for maximum coverage area	High-efficiency, brushless DC/EC motor	Handheld remote Mobile app Voice control	Temperature, humidity, and motion sensors enable SenseME Technology	Voice control with Google Assistant or Amazon Alexa	Flat or sloped ceilings 9 ft (2.7 m) or taller Maximum slope: 34°	LED light kit Chromatic Uplight (indoor only)

Ordering Information

Diameter	Finish	Downrod ⁵	LED Light	0–10 V
MK-ES62-052306: 60 in. (152 cm) MK-ES62-062306: 72 in. (183 cm) MK-ES62-072306: 84 in. (213 cm)	A786: Black A787: White	I07: 7 in. (152 mm) I20: 20 in. (305 mm) I32: 32 in. (610 mm) I00: 48, 60 in. (1219, 1524 mm)	S2: LED Light S80: Chromatic Uplight	V54: 0–10 V

Finish Options



White



Black

LED Light Kit



Remote



Magnetic Holder

Fixed Wall Mount



Lead times may vary.

Warranty period and terms vary by country and application.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500