




i6 LED LIGHT KIT

NEXT-LEVEL BRIGHTNESS, COLOR RANGE, AND AUTOMATED CONTROL

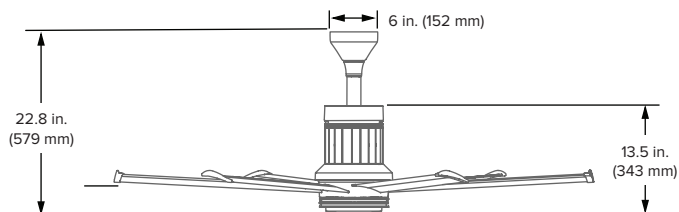

Technical Specifications

Operating Voltage	Operating Current	Nominal Input Power	Operating Temperature	Nominal Lumen Output	Efficacy	Color Rendering Index (CRI)	Corresponding Color Temperature (CCT)	Dimming Range
+24 VDC	1.1 A	26.1 W	32° to 104°F (0° to 40°C)	1,770 lm	72.6 lumens/watt	93.3	2700–4000 K	1% to 100%

Construction and Controls

Heat Sink	Lens	Installation	Environment	Controls ¹	Settings
Cast aluminum	Diffused translucent lens Made from durable polycarbonate	Twist-lock quick connect for seamless integration	Indoor and covered outdoor use	Handheld remote i6 by BAF mobile app Voice control 0–10 V Motion Sensing	16 brightness settings Dim to warm Four color temperature settings: 2700 K: Warm White 3000 K: Soft White 3500 K: Natural White 4000 K: Bright White


Light Off



Light On



Finish Options²

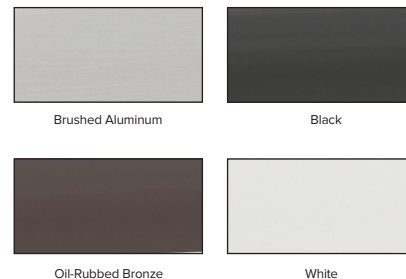

¹ Voice control requires an Amazon Alexa-enabled device or the Google Assistant.
² Light heatsink finish matches full fan finish color.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500