



DIY[®] EASY PRO[®]



JUST ASK
amazon alexa

works with the
Google Assistant

Includes 11.5 ft in
Pre-charged Quick-
Connect Line Set *

SMART HVAC
CONTROLLER[®]

Professional Comfort. **DIY[®] Price Tag.**

SCAN HERE
for the most up-to-date
version of this brochure.



Eligible for
MRCOOL[®]
CARE[✓]
PROGRAM

CHARGED WITH
R-454B
REFRIGERANT

COMFORT That Fits Your Budget.

OPERATES FROM
-13°F - 122°F
AMBIENT TEMPERATURES



No specialized tools. No complicated setup. Just reliable comfort, on your terms.

The **MRCOOL® DIY® Easy Pro®** mini-split heat pump was built for homeowners who want reliable heating and cooling without the cost of professional installation.

By combining proven MRCOOL® technology with simplified features, the DIY® Easy Pro® delivers dependable performance at a price that makes ductless comfort more accessible than ever.

Whether you're upgrading a bedroom, garage, home office, or rental property, the DIY® Easy Pro makes it possible to take control of your comfort — *and your budget.*



ENERGY SAVINGS

Variable speed technology
Energy Star® certified models



EASY MAINTENANCE & INSTALLATION

Washable filters
No major renovations, patching or painting required



COMFORT IN ANY CLIMATE

Operate in temperatures as low as
-13°F and as high as 122°F

EVERYDAY PERFORMANCE THAT SAVES YOU MONEY

- Inverter technology helps reduce energy use
- Efficient heating and cooling year-round
- Quiet operation for living spaces
- R-454B future-ready refrigerant

CONTROL FROM ANYWHERE

Use the MRCOOL® Comfort App to:

- Adjust temperature
- Change modes
- Create schedules
- Monitor performance



YOU DON'T HAVE TO SACRIFICE
PERFORMANCE
FOR A **GREAT PRICE.**



Everything You Need for Reliable Comfort.

TRUE DIY Installation Starts with the Pre-Charged DIY[®] Line Set.




**NEW
INCLUDED
11.5 ft
LINE SET**

LINE SETS ARE AVAILABLE IN LENGTHS OF
16', 25', 35' AND 50'
AS AN OPTIONAL PURCHASE.

MRCOOL[®] pre-charged DIY[®] Quick Connect[®] line sets eliminate specialized tools, refrigerant handling, and professional installation barriers.

- **PRE-CHARGED CONVENIENCE:** Factory-sealed refrigerant eliminates the need for manual charging.
- **QUICK CONNECT[®] TECHNOLOGY:** Tool-free connections ensure a secure, leak-proof seal.
- **NO SPECIALIZED EQUIPMENT:** Install without vacuum pumps, manifold gauges, or complex gear.
- **INDEPENDENT INSTALLATION:** No HVAC license or refrigerant handling required for setup.

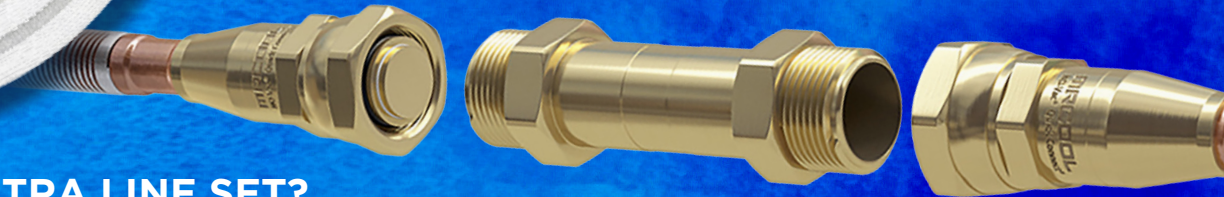


DO YOU NEED EXTRA LINE SET?

MRCOOL[®] DIY[®] systems arrive ready to connect, eliminating vacuuming, specialized tools, and the need to handle refrigerant—making true DIY installation possible. Combine two standard line sets with our Quick Connect[®] Coupler for custom-length installations.

CHOOSE THE RIGHT
SIZE FOR YOUR SPACE
9K | 12K | 18K | 24K

UP TO
20.2
SEER2

UP TO
9.3
HSPF2-4

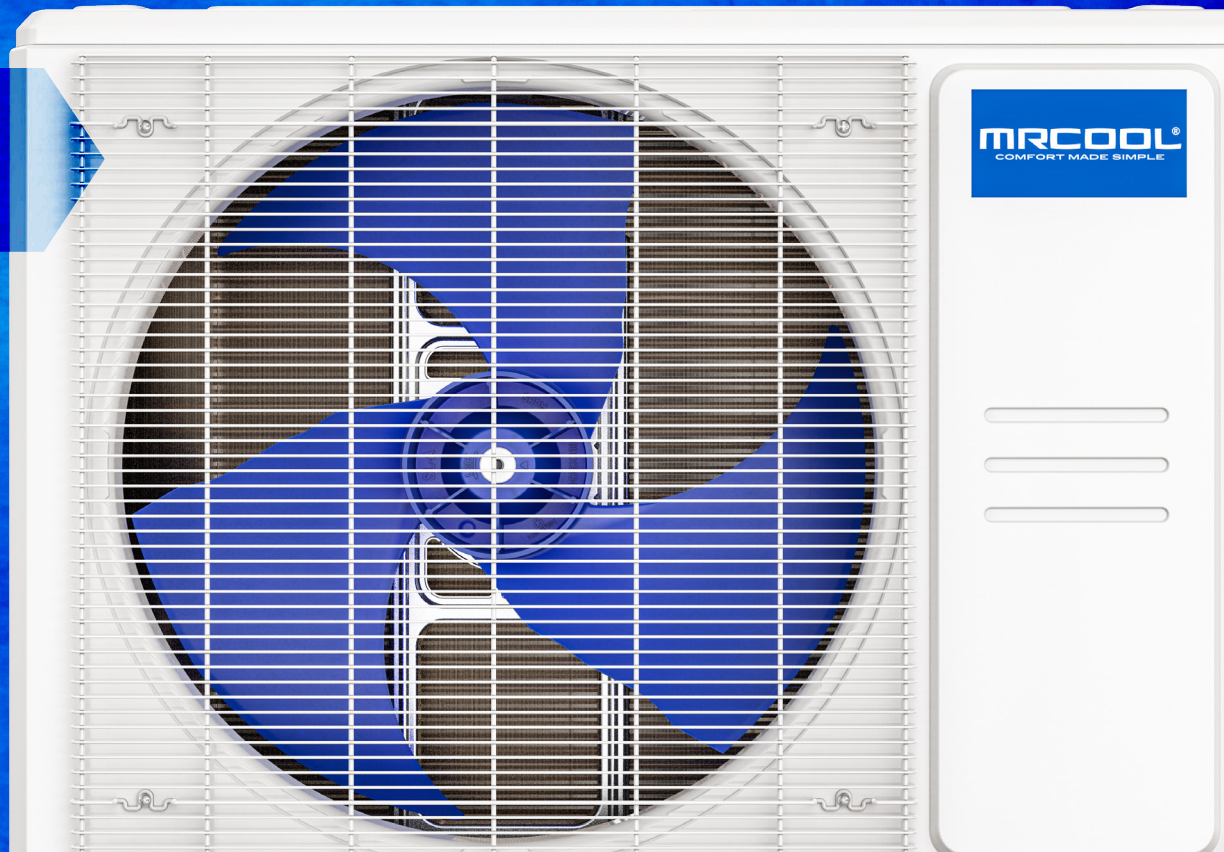

MRCOOL[®]
COMFORT MADE SIMPLE



Timer



Leakage Detection



Follow Me®



Gold Fin® Condenser



Smartphone App

LOW 5°F

Low Temp Cooling*



Quiet Running



DC Inverter

MODEL NO.	Indoor Unit		EZPRO-09-HP-WMAH-115DE-0	EZPRO-12-HP-WMAH-115DE-0	EZPRO-18-HP-WMAH-230DE-0	EZPRO-24-HP-WMAH-230DE-0
	Outdoor Unit		EZPRO-09-HP-C-11511DE-0	EZPRO-12-HP-C-11511DE-0	EZPRO-18-HP-C-23011DE-0	EZPRO-24-HP-C-23011DE-0
CAPACITY & PERFORMANCE						
Cooling Capacity	Btu/h		9000	12000	17000	24000
SEER2	Btu/W		20.2	19.5	20.0	18.9
EER2	Btu/W		11.3	9	9.8	9.7
Heating Capacity	Btu/h		10000	12000	18000	25000
HSPF2-4	Btu/W		9.2	9.3	8.5	8.7
HSPF2-5	Btu/W		7.1	7	6.6	6.9
Max Coverage Area*	Sq Ft		Up to 400	Up to 550	Up to 800	Up to 1050
Indoor noise level (Turbo/Hi/Mi/Lo/Si)	dB(A)		43/35/31/22/18	44.5/40/35/25.5/17.5	46.5/43/36.5/30/18.5	51.5/45.5/40.5/26.5/21.5
Outdoor noise level	dB(A)		54	54	55	61
*Max Coverage Area is determined using ideal installation conditions.						
ELECTRICAL PARTS						
Power Supply	Ph-V-Hz		115V,1Ph,60Hz	115V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz
Indoor Minimum Circuit Ampacity	A		3.0	3.0	3.0	3.0
Indoor Maximum Fuse (Breaker)*	A		15.0	15.0	15.0	15.0
Outdoor Minimum Circuit Ampacity	A		17.0	19.5	15.0	19.0
Outdoor Maximum Fuse (Breaker)*	A		20.0	20.0	20.0	20.0
DIMENSIONS & WEIGHT						
Net Dimension (WxDxH)	Indoor	inch	28.70 x 7.87 x 11.50	31.57 x 7.87 x 11.61	38.23 x 8.98 x 12.64	42.60 x 9.21 x 13.27
	Outdoor	inch	28.35 x 10.63 x 19.49	28.35 x 10.63 x 19.49	30.12 x 11.93 x 21.85	35.04 x 13.46 x 26.50
Packing Dimension (WxDxH)	Indoor	inch	32.68 x 16.14 x 13.58	36.02 x 17.95 x 14.17	41.14 x 12.01 x 15.94	46.73 x 17.67 x 14.09
	Outdoor	inch	32.87 x 10.63 x 21.26	32.87 x 10.63 x 21.26	34.92 x 13.27 x 24.02	39.17 x 15.67 x 29.13
Net / Gross Weight	Indoor	lbs	23.81 / 33.95	24.91 / 35.71	30.64 / 44.97	35.49 / 49.60
	Outdoor	lbs	54.67 / 66.58	54.89 / 67.24	62.61 / 82.23	95.90 / 117.73
REFRIGERANT & PIPING						
Refrigerant Type (R-454B)	oz		17.28	21.52	34.92	50.44
Piping Size Liquid Side/Gas Side	inch		1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"
REBATE SUMMARY						
NEEP			✓	✓	✓	✓
GHG					✓	✓
CEE Tier1 - North			✓	✓	✓	✓

All specifications are preliminary and are subject to change during mass production.